



Tensile Facades
aero W light

aero **W** light

Aero W light is the lightest profile in our range.

Easy to use, it can be fixed directly on a wall or any other existing structure and allows for the implementation of small and medium sized frames.

Aero W light is the ideal solution for making textile structures up to 20 m², at a very competitive price. Champion of the budget-friendly arena.

SMALL & MEDIUM TENSILE PANELS

◆ **Thermals :**

Associated with Serge Ferrari's Frontside View 381 membrane, the textile facade blocks up to 78% of solar heat.

◆ **Resistance :**

Laboratory test results show a breakout resistance at up to 1.77 T ml for Aero W Light, hence its status of go-to solution for entry-level installations, with no compromise on flexibility and reliability.

Incredible facades have been deployed using this system since 2004, in France and internationally. We lost count !

◆ **Small & Medium Formats :**

Aero W light empowers tensile facades without visible reinforcements, as it is fixed on the existing structure.

FTI recommends a maximum surface of 20m² per panel, depending on wind exposure.

A SIMPLE CONSTRUCTIVE SYSTEM

◆ **Technique :**

With only 4 involved elements, including the membrane, you're ready to assemble your tensile panels, quickly and effectively.

FTI's tensioning system does not require any membrane sewing or welding.

From the membrane to the frame, there's only one step !

Our network of specialists will take care of high-frequency welding operations, for large membranes.

We have you covered.

Aero W light can be screwed to all materials

◆ **Tooling :**

Soft-impact Mallet + FTI tightening tool + Basic Tooling.


A LIGHTWEIGHT EYE-CATCHING TENSILE FACADE

◆ **Superior Finish :**




Aero W light brings easy-to-implement solutions to life, without compromising on aesthetics.



aero **W** light

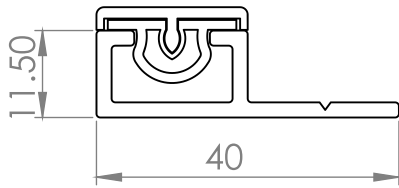

Scale 1:1

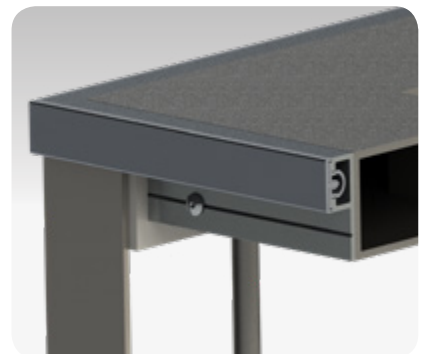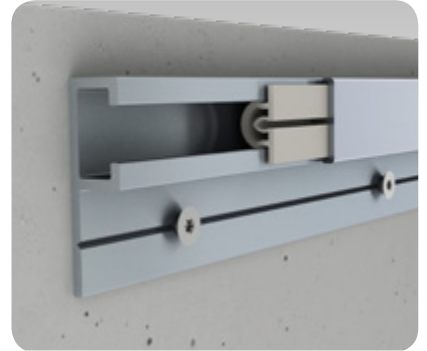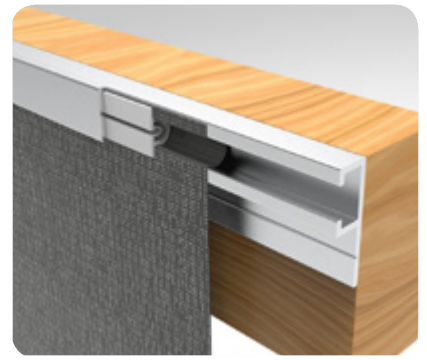

CHARACTERISTICS

Width	40 mm
Thickness	11.50 mm
Weight	300g/m
Maximum Surface	20 m ²
Inertia	Lxx = 1788.19 Lxy = -2011.80 Lxz = 0.00 Lyx = 2011.80 Lyy = 17122.30 Lyz = 0.00 Lzx = 0.00 Lzy = 0.00 Lzz = 18910.49
Surface Treatment	Anodized 15μ / natural aluminum / powder-coated
Bars Length	2650 mm or 5300 mm
Sold with	Gripp PVC + Key



WIND RESISTANCE
160 Km/h



100% RECYCLABLE



TEARING 1,7T/lm



SURFACE 20 m²/frame



FACADES COVERING



PATENTED SYSTEM



BENDABLE PROFILE



